
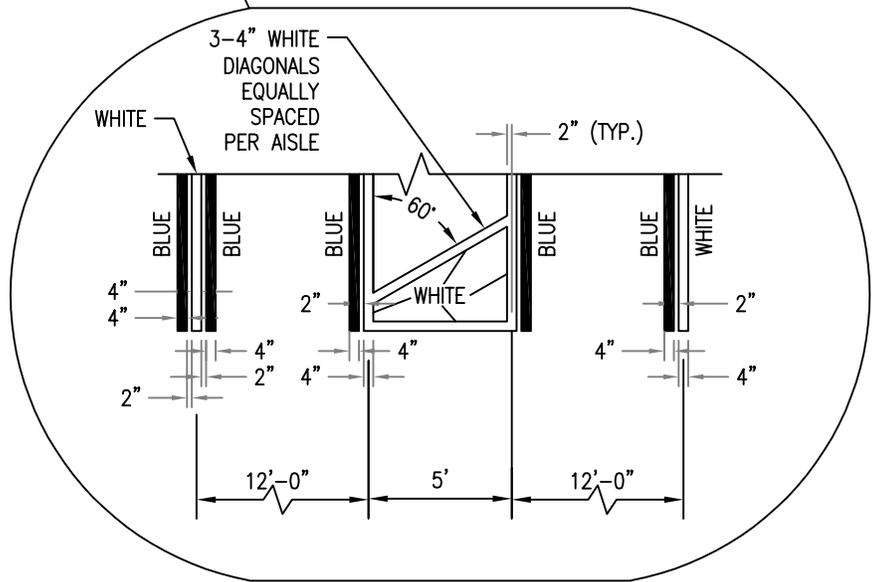


NOTE:

1. SEE SHEET 4 OF 4 FOR NOTES.

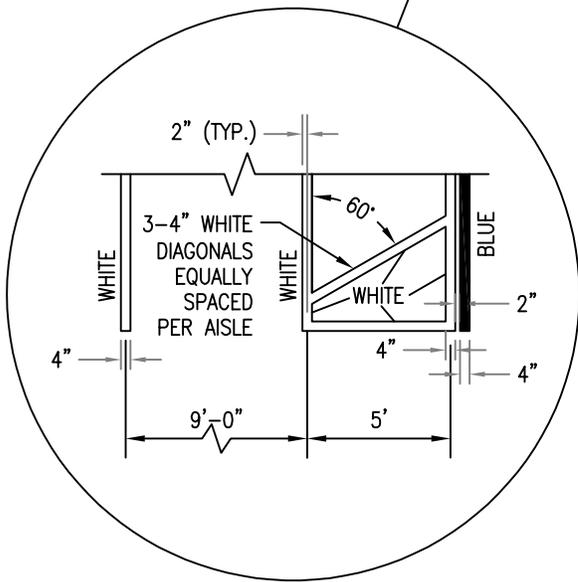

CITY OF PEMBROKE PINES
ENGINEERING/UTILITIES DIVISION

STANDARD ROAD DETAIL

APPROVED: K.M.K.

REVISED:

09/05/23

09/09/20

12/01/18

DATE: 12/01/18


ACCESSIBLE PARKING
SPACE DETAILS



R-32


SHEET 1 OF 4

BOLLARD CENTERED ON
2" SPACE BETWEEN
WHITE AND BLUE STRIPE

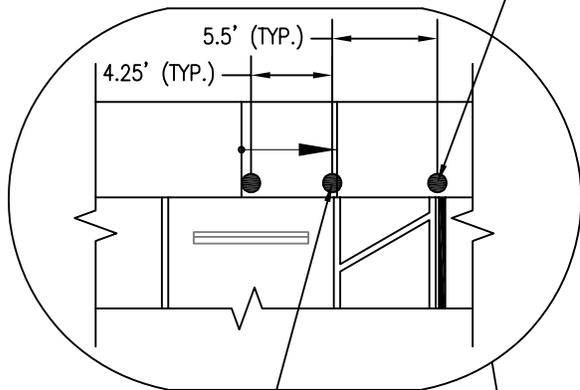

BOLLARD CENTERED @
1" INTO STANDARD SPACE

RECOMMENDED ACCESSIBLE SIGN LOCATION:
FTP 21-06 AND FTP 22-06 (TYP.)

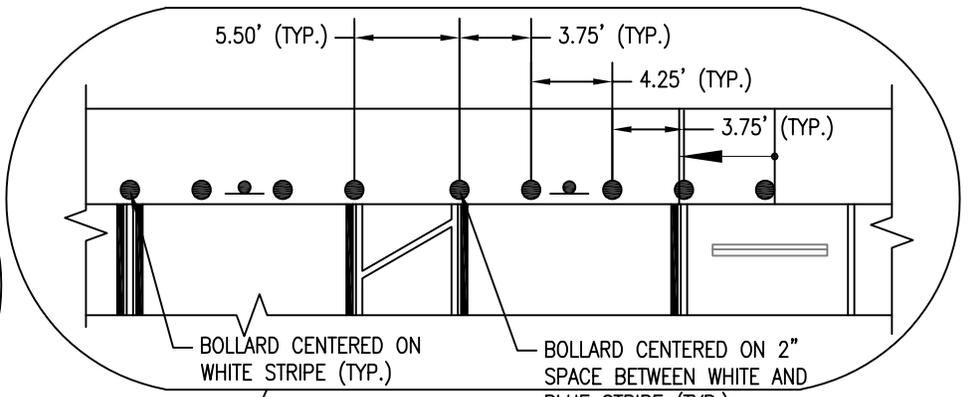


BOLLARD CENTERED ON
WHITE STRIPE (TYP.)

BOLLARD CENTERED ON 2"
SPACE BETWEEN WHITE AND
BLUE STRIPE (TYP.)

OPTIONAL ACCESSIBLE SIGN LOCATION

6" DIAMETER GALVANIZED STEEL PIPE BOLLARD FILLED
WITH CONCRETE AND PAINTED WITH REFLECTORIZED
SAFETY PAINT OR HAVING APPROVED BOLLARD
COVERS/SLEEVES.
(ENGINEER SHALL PROVIDE DESIGN DETAIL FOR BOLLARD
ADDRESSING APPROPRIATE IMPACT RESISTANCE
LEVEL/IMPACT PROTECTION PER ASTM F3016/F3016M-19)

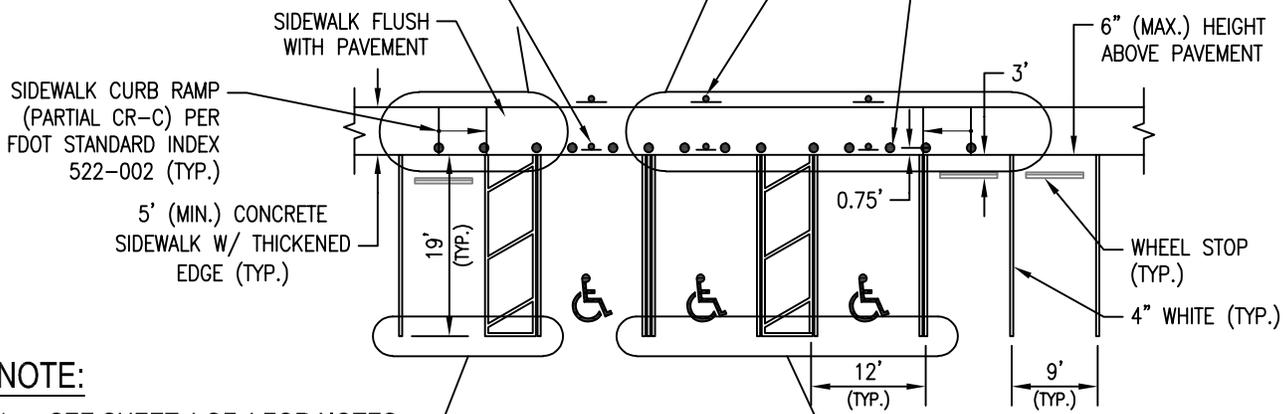

SIDWALK CURB RAMP
(PARTIAL CR-C) PER
FDOT STANDARD INDEX
522-002 (TYP.)

5' (MIN.) CONCRETE
SIDWALK W/ THICKENED
EDGE (TYP.)

SIDWALK FLUSH
WITH PAVEMENT



6" (MAX.) HEIGHT
ABOVE PAVEMENT

WHEEL STOP
(TYP.)

4" WHITE (TYP.)

NOTE:

1. SEE SHEET 4 OF 4 FOR NOTES.

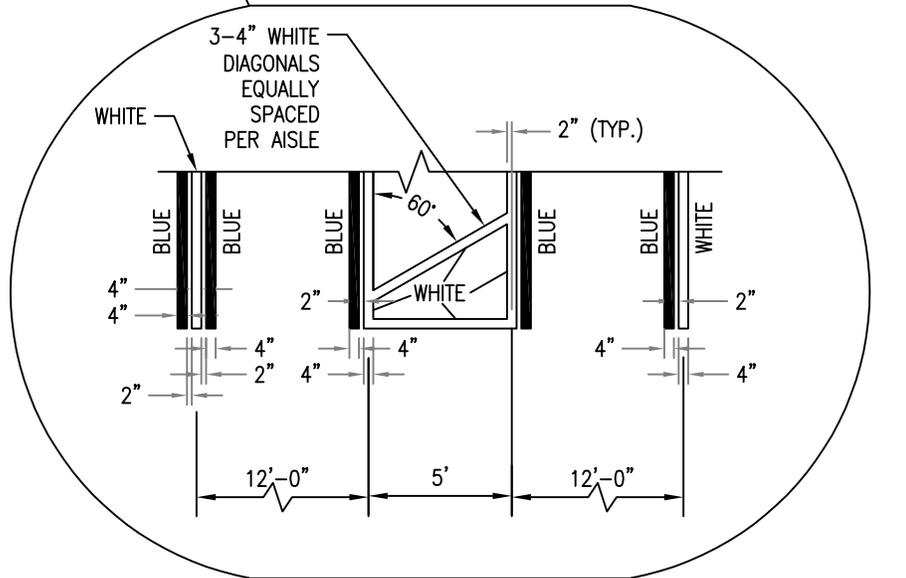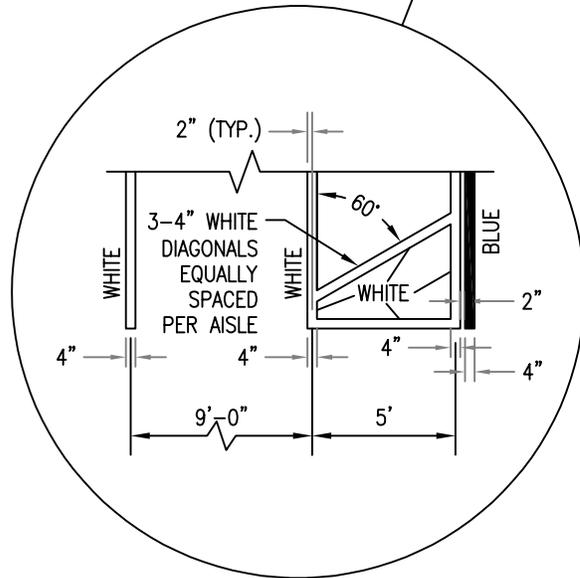

CITY OF PEMBROKE PINES
ENGINEERING/UTILITIES DIVISION

STANDARD ROAD DETAIL

APPROVED: K.M.K.


REVISED:

09/05/23


09/09/20

DATE: 10/24/19



ACCESSIBLE PARKING
SPACE DETAILS



R-32

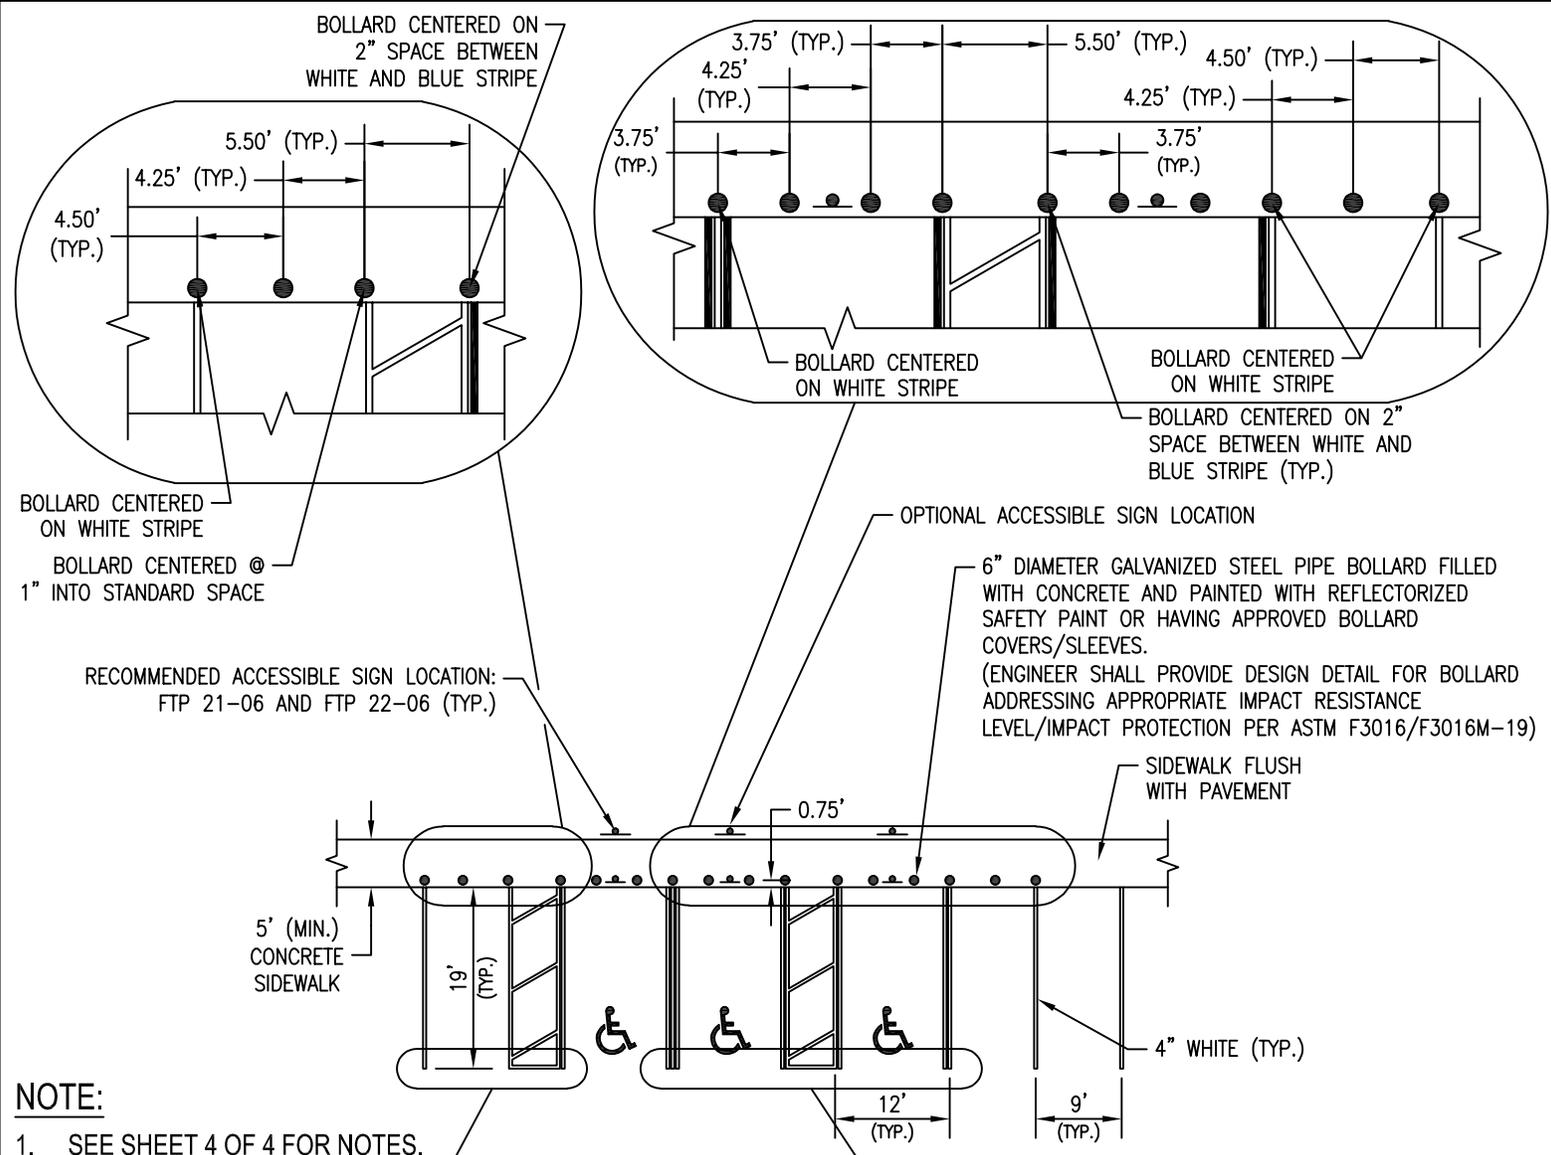



NOTE:
 1. SEE SHEET 4 OF 4 FOR NOTES.

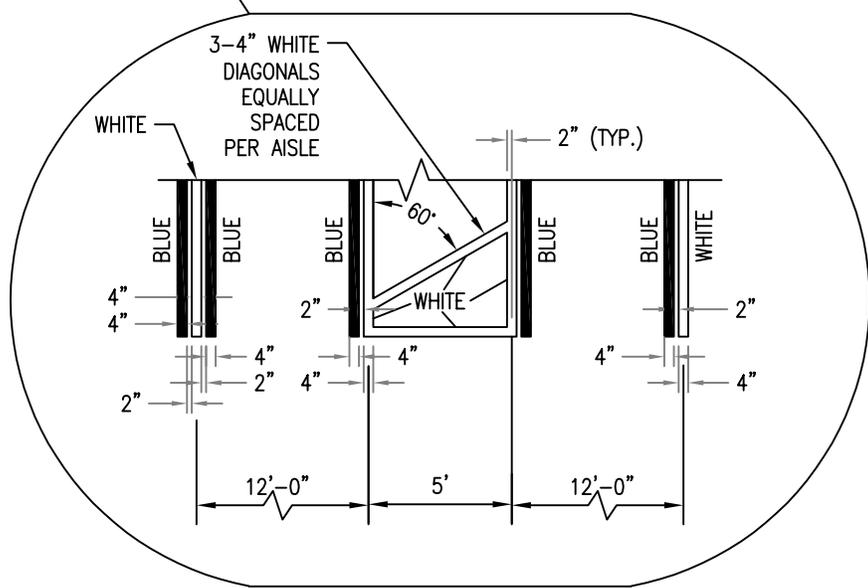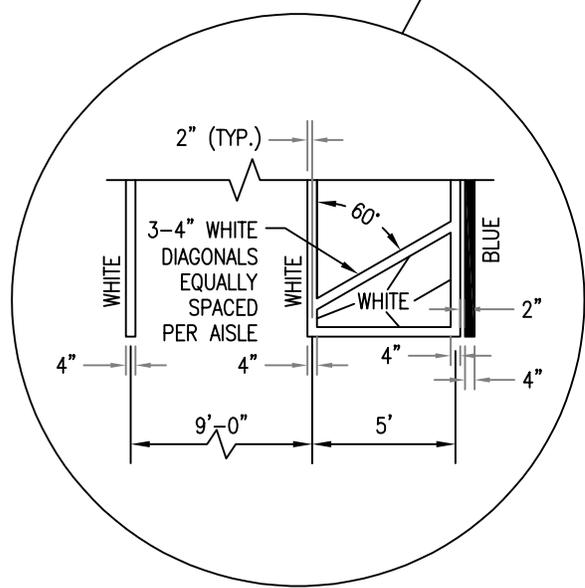

CITY OF PEMBROKE PINES
 ENGINEERING/UTILITIES DIVISION
 APPROVED: K.M.K.
 DATE: 10/24/19
 REVISED: 09/05/23
 09/09/20

STANDARD ROAD DETAIL
 ACCESSIBLE PARKING
 SPACE DETAILS

CITY OF PEMBROKE PINES
 GREAT SEAL OF THE CITY OF PEMBROKE PINES
 JOIN US - PROGRESS WITH US
R-32
 SHEET 3 OF 4

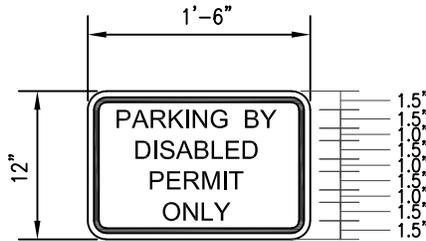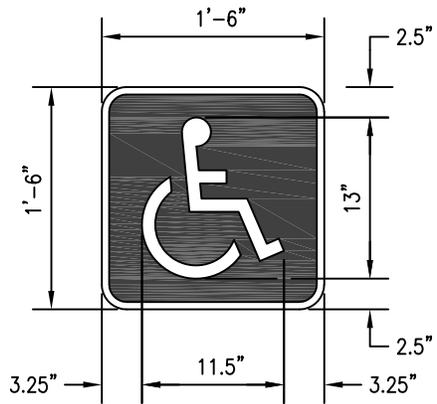


FTP-21-06



FTP-22-06

NOTE:

1. SIZE TO BE 5 FEET IN HEIGHT AND WHITE IN COLOR.

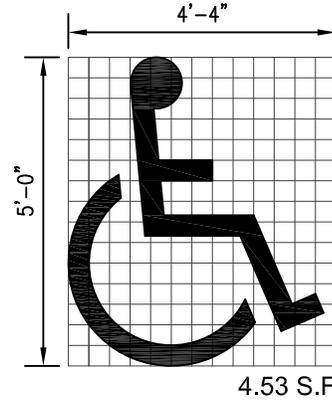

ACCESSIBLE PAVEMENT SYMBOL

SIGNAGE NOTES:

1. TOP PORTION OF FTP 21-06 SHALL HAVE A REFLECTIVE BLUE BACKGROUND WITH WHITE REFLECTIVE SYMBOL AND BORDER.
2. BOTTOM PORTION SHALL HAVE A REFLECTIVE WHITE BACKGROUND WITH BLACK OPAQUE LEGEND AND BORDER.
3. ALL LETTERS ARE 1" SERIES AT 1" SPACING
4. ALL SIGNS SHALL BE IN ACCORDANCE WITH FDOT STANDARD PLANS INDEX 700-102.
5. SIGN POST SHALL BE IN ACCORDANCE WITH BCTED "GROUND SIGN ASSEMBLY DETAILS", LATEST REVISION.

NOTES:

1. PROVIDE ♿ PAVEMENT SYMBOL IN ACCESSIBLE PARKING SPACES. THE SYMBOL SHALL BE WHITE IN COLOR PER ADA STANDARDS.
2. BLUE MARKINGS SHALL BE SHADE 15180 PER FEDERAL STANDARD 5959.
3. SLOPES NO GREATER THAN 1:48 (2.08%) SHALL BE PERMITTED IN ALL DIRECTIONS FOR BOTH THE ACCESSIBLE PARKING SPACE AND ACCESSIBLE PARKING ACCESS AISLE.
4. ALL RAMPS, SIDEWALK CURB RAMPS AND ACCESSIBLE ROUTES SHALL BE ADA COMPLIANT.
5. WIDTH MEASUREMENTS OF PARKING SPACES AND ACCESS AISLES SHALL BE MADE FROM THE CENTERLINE OF THE WHITE PAVEMENT MARKINGS. HOWEVER, WHEN PARKING SPACES OR ACCESS AISLES ARE ADJACENT TO A CURB OR EDGE OF PAVEMENT AND NOT ADJACENT TO ANOTHER PARKING SPACE OR ACCESS AISLE; THEN THE WIDTH MEASUREMENTS MAY INCLUDE THE FULL WIDTH OF THE LAST PAVEMENT MARKING.
6. ALL ACCESSIBLE ELEMENTS SHALL BE COMPLIANT WITH THE DEPARTMENT OF JUSTICE 2010 ADA STANDARDS FOR ACCESSIBLE DESIGN AND THE FLORIDA BUILDING CODE SIXTH EDITION FOR "ACCESSIBILITY".
7. ALL PARKING PAVEMENT MARKINGS SHALL BE 4" REFLECTORIZED PAINT MEETING FDOT/BCTED STANDARDS.

CITY OF PEMBROKE PINES ENGINEERING/UTILITIES DIVISION		STANDARD ROAD DETAIL			<h1>R-32</h1>
APPROVED: K.M.K.	REvised: 9/09/20	ACCESSIBLE PARKING SPACE DETAILS			
DATE: 12/01/18	9/15/20				
	12/01/18				